




Water Resources Research®

RESEARCH ARTICLE

10.1029/2022WR034308

Imaging and Modeling the Impact of Multi-Scale Pore Connectivity on Two-Phase Flow in Mixed-Wet Rock

Shan Wang^{1,2} , Arjen Mascini^{1,2} , Leonardo C. Ruspini³, Pål-Eric Øren³, and Tom Bultreys^{1,2} 

¹Department of Geology, Pore-Scale Processes in Geomaterials Research (PProGRes), Ghent University, Ghent, Belgium, ²Centre for X-ray Tomography (UGCT), Ghent University, Ghent, Belgium, ³Petricore Norway A.S., Trondheim, Norway

Key Points:

- We observe quasi-stable meniscus movements on mixed-wet sample that differ from the conventional capillary-driven filling behavior
- We quantify the fluid saturation in micrometer scale porosity to investigate how connectivity and wettability impact the displacements
- A multi-scale pore network model is used to interpret the imaging experiments

Supporting Information:

Supporting Information may be found in the online version of this article.

Correspondence to:

S. Wang,
Shan.Wang@UGent.be

Citation:

Wang, S., Mascini, A., Ruspini, L. C., Øren, P.-E., & Bultreys, T. (2023). Imaging and modeling the impact of multi-scale pore connectivity on two-phase flow in mixed-wet rock. *Water Resources Research*, 59, e2022WR034308. <https://doi.org/10.1029/2022WR034308>

Received 13 DEC 2022
Accepted 25 JUN 2023

Author Contributions:

Conceptualization: Shan Wang, Arjen Mascini, Leonardo C. Ruspini, Pål-Eric Øren, Tom Bultreys
Investigation: Shan Wang
Methodology: Shan Wang, Arjen Mascini, Leonardo C. Ruspini, Pål-Eric Øren, Tom Bultreys
Software: Leonardo C. Ruspini, Pål-Eric Øren
Supervision: Tom Bultreys
Validation: Shan Wang
Writing – original draft: Shan Wang, Tom Bultreys
Writing – review & editing: Shan Wang, Arjen Mascini, Leonardo C. Ruspini, Pål-Eric Øren, Tom Bultreys

Abstract The wetting properties of pore walls have a strong effect on multiphase flow through porous media. However, the fluid flow behavior in porous materials with both complex pore structures and non-uniform wettability are still unclear. Here, we performed unsteady-state quasi-static oil- and water-flooding experiments to study multiphase flow in two sister heterogeneous sandstones with variable wettability conditions (i.e., one natively water-wet and one chemically treated to be mixed-wet). The pore-scale fluid distributions during this process were imaged by laboratory-based X-ray micro-computed tomography (micro-CT). In the mixed-wet case, we observed pore filling events where the fluid interface appeared to be at quasi-equilibrium at every position along the pore body (13% by volume), in contrast to capillary instabilities typically associated with slow drainage or imbibition. These events corresponded to slow displacements previously observed in unsteady-state experiments, explaining the wide range of displacement time scales in mixed-wet samples. Our new data allowed us to quantify the fluid saturations below the image resolution, indicating that slow events were caused by the presence of microporosity and the wetting heterogeneity. Finally, we investigated the sensitivity of the multi-phase flow properties to the slow filling events using a state-of-the-art multi-scale pore network model. This indicated that pores where such events took place contributed up to 19% of the sample's total absolute permeability, but that the impact on the relative permeability may be smaller. Our study sheds new light on poorly understood multiphase fluid dynamics in complex rocks, of interest to for example, groundwater remediation and subsurface CO₂ storage.

1. Introduction

Immiscible two-phase flow through porous media is very common in natural subsurface systems. A thorough understanding of fluid flow mechanisms has crucial applications in geological CO₂ sequestration (Shukla et al., 2010), contaminated groundwater remediation (Kalhor et al., 2019) and subsurface energy storage (Panfilov, 2010). In recent years, in order to better characterize the intricate internal pore structures of porous materials, advanced imaging techniques such as X-ray micro-computed tomography (micro-CT) have been widely applied in the laboratory (Chen et al., 2021; Gao et al., 2019; Iglauer et al., 2011; Lin, Akai, et al., 2021; Li, Bijeljic, et al., 2021; Van Offenwert et al., 2019). The combination of X-ray micro-CT imaging with flow experiments has greatly facilitated the study of multiphase flow behavior at the pore scale. High-resolution images can provide important information to quantify the flow properties including fluid distributions (Lin, Akai, et al., 2021; Li, Bijeljic, et al., 2021), fluid flow dynamics (Reynolds et al., 2017; Singh et al., 2022; Spurin et al., 2019), filling characteristics (Bultreys et al., 2018; Gao et al., 2020), interfacial properties (Garing et al., 2017; Herring et al., 2017; Zankoor et al., 2021), etc., which cannot be measured in traditional core flooding experiments.

Wettability is known to play a crucial role in multiphase flow through porous rocks. It controls the fluid invasion sequences and the fluid distribution state in the pore network, which in turn influences the constitutive properties used in continuum models, for example, capillary pressure and relative permeability. While most minerals are water-wet, the adhesion of surface active components present in for example, crude oil or certain environmental pollutants can lead to changes in the fluid affinity to the surface, that is, wettability alteration (Al-Futaisi & Patzek, 2004; Buckley et al., 1998; Gao et al., 2020; Morrow, 1990). For example, in a mixed-wet system pore surfaces in larger pores become hydrophobic due to direct contact with surface active components, while corners, crevices and smaller pores retain water and therefore remain more hydrophilic. This is influenced by a number of factors, including surface roughness, pore morphology, mineral composition, etc. (AlRatrouf et al., 2018b; Garfi et al., 2020). At the pore scale, the resulting wettability alteration is reflected by changes in local contact angles. Recent advances in image processing algorithms have made it possible to quantify this directly on 3D images of

the fluid distribution (Andrew et al., 2014; Klise et al., 2016; Scanziani et al., 2017). The contact angle measured on segmented images is usually termed the “geometric contact angle” in literature (Alhammedi et al., 2020). This calculation can be done either manually or automatically. More recently, the thermodynamic contact angle (Blunt et al., 2019), event-based contact angle (Mascini et al., 2020), force-based contact angle (Mascini et al., 2020) and topology-based contact angle (Sun et al., 2020) were proposed to reduce the uncertainty of measuring contact angles during a displacement process.

Although significant progress has been achieved in revealing complex fluid dynamics in porous media based on advanced imaging techniques, most research has focused on materials with homogeneous wettability (mostly water-wet state) and simple pore structures (Berg et al., 2013; Datta et al., 2014; Rücker et al., 2015; Van Offenwert et al., 2019). The fluid flow mechanisms in heterogeneous rocks with non-uniform wetting, in which the pore sizes span from a few nanometers to centimeter scale, are still poorly understood. Alhammedi et al. (2020), Li, Akai, et al. (2021), and Lin, Bijeljic, et al. (2021) performed co-injection experiments to measure relative permeability in altered-wettability carbonate samples, but the macroscopic capillary pressure cannot be obtained from this type of experiments. Mascini et al. (2021) recently reported a newly discovered fluid invasion phenomenon in a rock with both structural and wetting heterogeneity: a significant proportion of the pore-scale fluid displacements were observed to be several orders of magnitude slower than the traditional displacement types found in neighboring pores (e.g., Haines jumps). They hypothesized that the complex wettability and pore space architecture changed the local capillary-viscous force balance, which could be the main reason for the concurrence of these slow filling events and fast displacements. However, they only showed the fluid dynamics during waterflooding, and couldn't fully relate the behavior to the effects of microporosity (i.e., the porosity for pores below image resolution). To further explain what causes this filling behavior and how important it is in slow flooding, it is necessary to develop a comprehensive experimental and simulation workflow to study the underlying mechanisms of multiphase flow in geological rocks with complex wettability and pore structures.

In this paper, we introduce an experimental procedure that uses both oil-wet and water-wet porous plates to perform unsteady-state capillary oil and waterflooding on heterogeneous sandstone samples in water-wet and mixed-wet conditions, while imaging the pore structures and the fluid invasion characteristics by laboratory-based X-ray micro-CT scanning. By performing the experiments quasi-statically, the quality of the micro-CT images is high enough to quantify microporosity and fluid saturations. Section 2 shows the experimental materials, procedures and data processing workflow. In Section 3, we first introduce the observed pore filling behavior in the two samples under quasi-static flooding (Section 3.1). The possible reasons leading to the gradually filling behavior in the mixed-wet sample are then analyzed based on the wettability characterization (Section 3.2) and the analysis of the pore network characteristics (Section 3.3). Section 3.4 provides a novel workflow to investigate the sensitivity of the multiphase flow properties to the slow movement of the fluid menisci, using a state-of-the-art multi-scale pore network model (PNM) for porous media with heterogeneous architecture and wettability distribution.

2. Materials and Methods

2.1. Materials

There were two Luxembourg sandstone samples used in this study. The Luxembourg sandstone is a heterogeneous, calcareous quarried sandstone with complex pore structures, which consist of macropores and a significant fraction of microporosity (Molenaar, 1998). Mercury intrusion porosimetry on a sister sample showed it has a bimodal pore throat size distribution (Figure S1 in Supporting Information S1) centered on 2 and 20 μm and a porosity of 18.76% (Mascini et al., 2021). One sample was water-wet with 20 in length and 6 mm in diameter. Another (13 in length and 6 mm in diameter) was chemically treated to change the wettability by immersing the cleaned and dried sample in 25 ml of decane with 5 wt% octadecyltrichlorosilane (OTS) and sonicating it in an ultrasonic bath for 5 min, which partially saturates the sample with the solution. After 24 hr, the sample was removed from the solution, followed by cleaning with isopropanol and drying. The treated sample was wrapped in teflon tape and stored in a desiccator. For more details on the wettability treatment, we refer to Mascini et al. (2021).

For the experiment, a brine solution made from deionized water doped with 25 wt% potassium iodine (KI) was prepared as the aqueous phase to provide image contrast, so that the fluids in the pores could be distinguished. n-Decane was used as the oil phase.

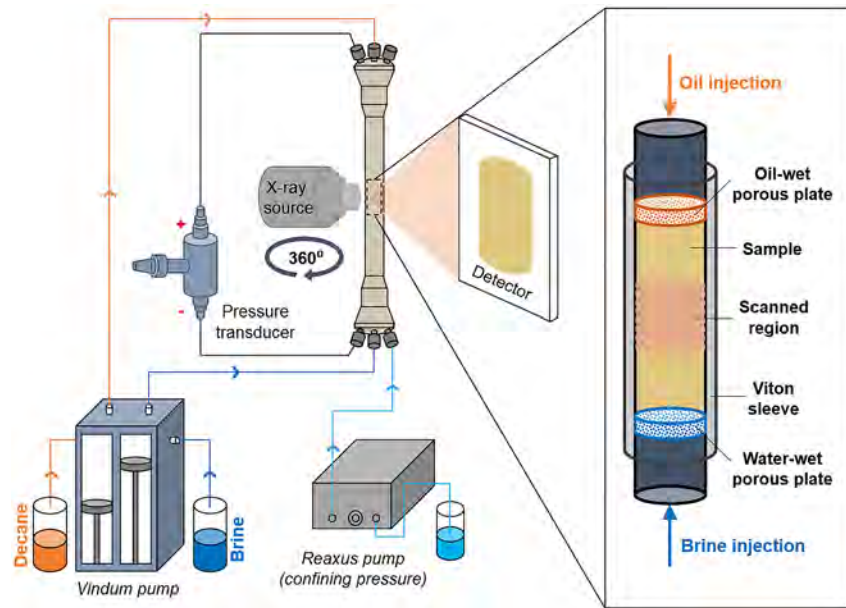


Figure 1. Experimental apparatus and detail of assembly inside the flow cell.

2.2. Flow Apparatus and Procedure

The aim of the unsteady-state flow experiment performed here was to investigate the fluid invasion and distribution mechanisms during quasi-static oil and water flooding under different wettability conditions. Figure 1 shows the flow apparatus. The sample was placed in a fluoropolymer elastomer (Viton) sleeve with a hydrophobic and a hydrophilic porous plate fitted on its top and bottom, respectively. The tight pore sizes (150 nm in diameter, threshold $P_c \sim 12.9$ bar) of the porous plates prevented the early breakthrough of invading fluid (i.e., hydrophobic and hydrophilic porous plates prevented brine and decane passing through at low pressures, respectively) and created a relatively homogeneous saturation profile during fluid injection. The two end pieces connected the sample to the flow lines. This assembly was mounted in a PEEK hassler-type flow cell which is X-ray transparent (RS Systems, Norway). A Vindum Engineering VP-12 pump was used to pump the two fluid phases into the samples. The pressure drop over the sample was measured by a differential pressure transducer (Keller PD-33X).

The flow cell was mounted in the Environmental Micro-CT (EMCT) scanner at the center for X-ray tomography at Ghent University (UGCT) (Bultreys et al., 2016; Dierick et al., 2014). This is a gantry-based system with a rotating source-and-detector assembly. This ensured that the sample and flow lines were kept static during image acquisition. For the image acquisition, the X-ray tube settings were 110 kV and 8 W, the voxel size was 6.5 μm , and we used a 1.15 s integration time per radiograph for 2,400 projections.

The experiment consisted of decane injection into a brine saturated sample, followed by brine injection. Both injections took place at low capillary numbers (Ca). The Ca is defined as the ratio of capillary forces to viscous forces ($Ca = \mu q / \sigma$, where μ is the dynamic viscosity of the injected fluid, q is the Darcy velocity, and σ is interfacial tension between two fluids). Typically, the system is considered to be capillary dominated flow if Ca is lower than 10^{-6} (Guo et al., 2022)). For convenience, we will refer to the injection of decane and brine as oil and water flooding in following sections. The confining pressures for both samples were kept at 3,800 kPa during the whole process. After taking a dry micro-CT scan, brine was pumped into the samples for several hours, where the pressure drop over the samples was controlled at $3,000 \pm 100$ kPa, to fully displace air inside, and a brine-saturated scan was taken when no more changes were observed in sample. Then, decane was injected slowly (capillary number $< 10^{-9}$) from top to bottom, while the bottom water-wet porous plate prevented the oil phase to pass through. For each sample, a set of controlled, increasing capillary pressure steps were imposed, each by adjusting the flow rate to obtain a constant low differential pressure over the sample and the capillary plates. For the water-wet case, we obtained 4 pressure steps at 2.5, 4, 6, and 27 kPa. For the mixed-wet sample, the capillary pressures were 2, 3.5, 4.5, and 6 kPa. Each pressure step was followed by a micro-CT scan after pumping 12–24 hr, when no changes were observed anymore on differential radiographs. Then, the flow was

reversed: the decane pump was stopped, and brine was injected from the bottom to the top of the sample at 0.0008 ml/min ($Ca = 8.15 \times 10^{-10}$) for the water-wet sample and 0.0001 ml/min ($Ca = 1.02 \times 10^{-9}$) for the mixed-wet counterpart. Three micro-CT scans during this waterflooding process were taken for each sample. The top hydrophobic porous plate only allowed oil phase to flow out during this waterflooding process. Note that the reason we used a constant flow rate instead of constant pressure in this process is that for the water-wet sample, the invaded watery fluid always swells from micropores or smaller pores first. This can happen very quickly if the constant pressure is not controlled to a very high accuracy, resulting in fast oil phase trapping and reaching the residual oil saturation state in a short period of time. To avoid this risk, a very low constant flow rate was used in the waterflooding experiments on both samples. Considering that the imbibition in the water-wet sample can be expected to proceed faster than in the mixed-wet sample, we used a slightly lower flow rate for the former, to better record the fluid invasion process.

2.3. Image Processing

After reconstruction, the Avizo 2020.2 (Thermo Fisher Scientific, France) software was used for image processing. All the images were registered using normalized mutual information to a reference scan and resampled with the Lanczos algorithm (Batchelor & Waltz, 1993). This way, they were aligned in space. Following this, a non-local means edge-preserving filter (Buades et al., 2008) was applied to all images to reduce the noise. As can be seen in Figure 2, pore-filling and dissolution microporosity were commonly encountered. Because of the high X-ray attenuation coefficient of the KI in brine phase, the pores filled with brine had bright gray values in the images. In order to reduce segmentation errors, macropores were first segmented manually on the dry scan using histogram thresholding. Then, the entire porous phase including both macro- and micro-pores occupied by brine was segmented based on the difference image between the brine-saturated scan and the dry scan (note that this differential imaging method was validated in previous studies in the literature (Gao et al., 2017; Lin et al., 2016)). The microporous phase was obtained by subtracting macropores from the entire porous phase. After that, the rest of the voxels in the dry scan were assigned to the solid grain phase. Figure 2 shows the three phase segmentation results. For multiphase scans, the decane and brine within macropores were also classified with histogram thresholding, on which the labeled macro-pore space was used as a mask (Wang et al., 2022).

The porosity distribution can be calculated based on differential images between the brine saturated scan and the dry scan with the following equation:

$$\varphi_{\text{micro}} = \frac{I_{\text{diff}} - CT1}{CT2 - CT1} \quad (1)$$

where I_{diff} is the gray value difference of two scans, $CT1$ is the threshold value for solid phase (0% porosity), which was determined based on gray value at the boundary of the solid grain and microporous region in the histogram, $CT2$ is the threshold value for macropores (100% porosity), which was obtained by masking segmented macropores on differential image and finding the peak value existed in the gray value histogram. Similarly, the saturation distribution map can also be obtained with multiphase-dry differential image. The full details are provided in our previous publication (Wang et al., 2022).

For curvature measurements, the marching cube algorithm was applied on the segmented waterflooding images to generate triangulated surfaces, which were smoothed by a Gaussian filter with a constrained smoothing extent of three voxels to remove noise and staircase-like artifacts (Li et al., 2018). Following this, the oil-brine surfaces were extracted and approximated locally by a quadratic form. The eigenvalues and eigenvectors, which represent the values and directions of two principal curvatures, of this quadratic form were used to calculate the mean curvature, that is, $\kappa = (\kappa_1 + \kappa_2)/2$. Due to the limited image resolution (6.5 μm) and the complex pore structures, the segmentation on the rough edges of oil-brine interface near solid material may generate unrealistic curvature values. We followed the procedures presented in (Mascini et al., 2020) and (Li et al., 2018) to filter data points. The curvatures which had a radius of curvature value smaller than twice the voxel size, that is, $\kappa > 1/(2 \times \text{voxel size})$, were first removed as they were likely affected by artifacts. Then, the geodesic distance of each triangle was calculated by averaging the three shortest vertex distances on it. The distance weighting combined with interface modification (25% of the maximum geodesic distance was set as the threshold to eliminate uncertainties caused by rough edges) method was used to improve the curvature estimation by removing spurious values near the pore walls.

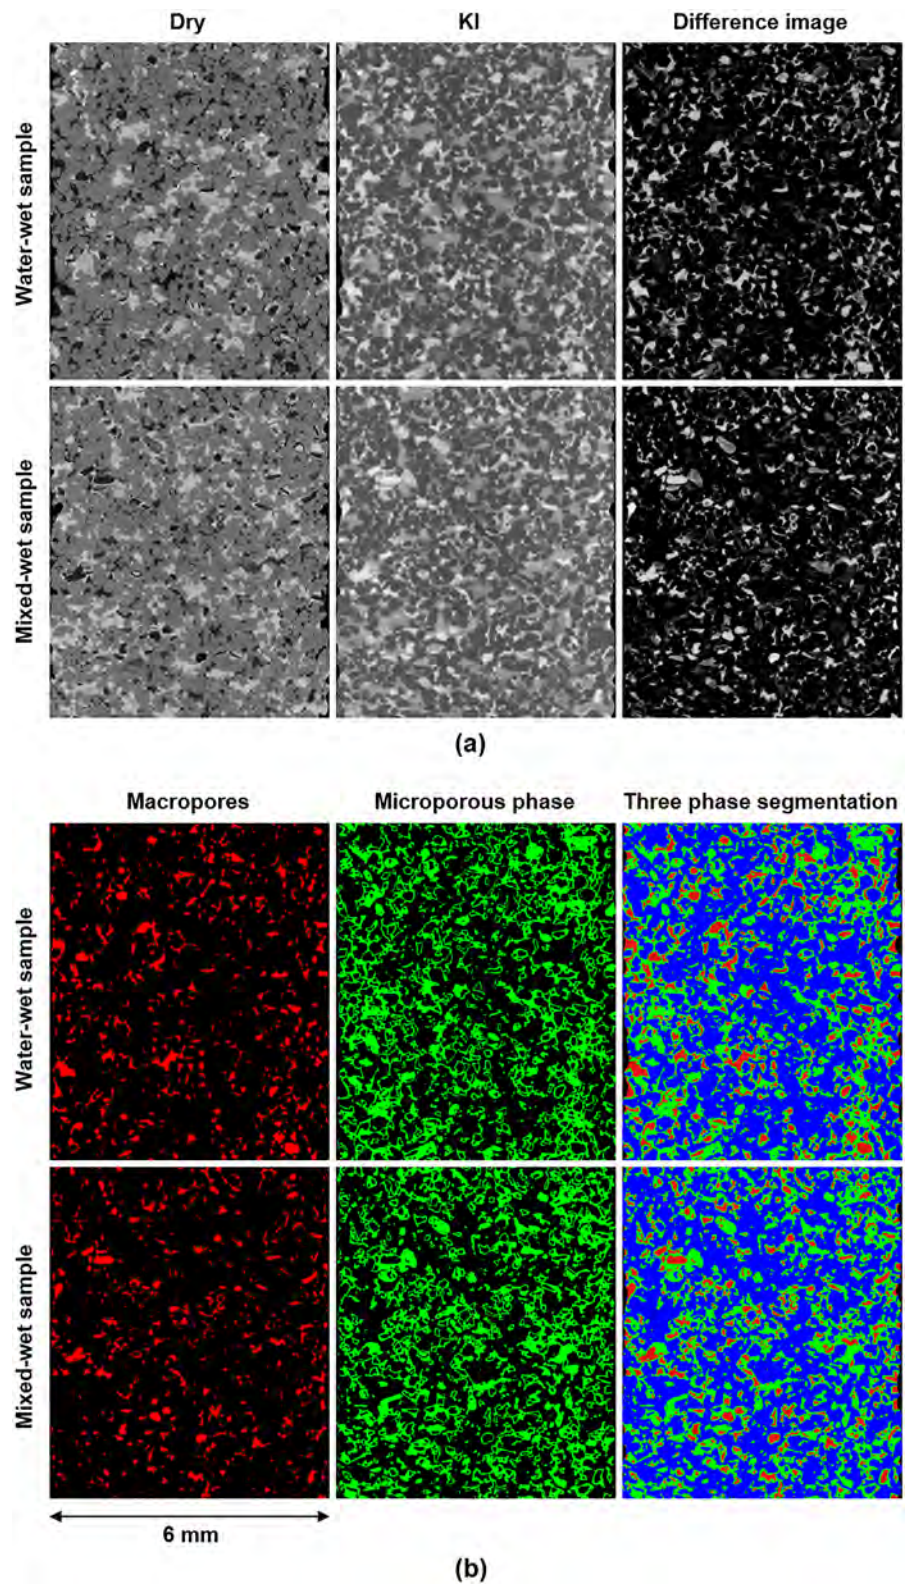


Figure 2. (a) Two-dimensional cross-sections of filtered water-wet and mixed-wet samples. The left, middle, and right columns show dry scan, brine-saturated scan, and the difference image between brine-saturated scan and dry scan. (b) The segmented macropores (left), microporous phase (middle), and all phases (right) for both samples. The red, green, and blue phases represent macropores, micropores, and solid grain.

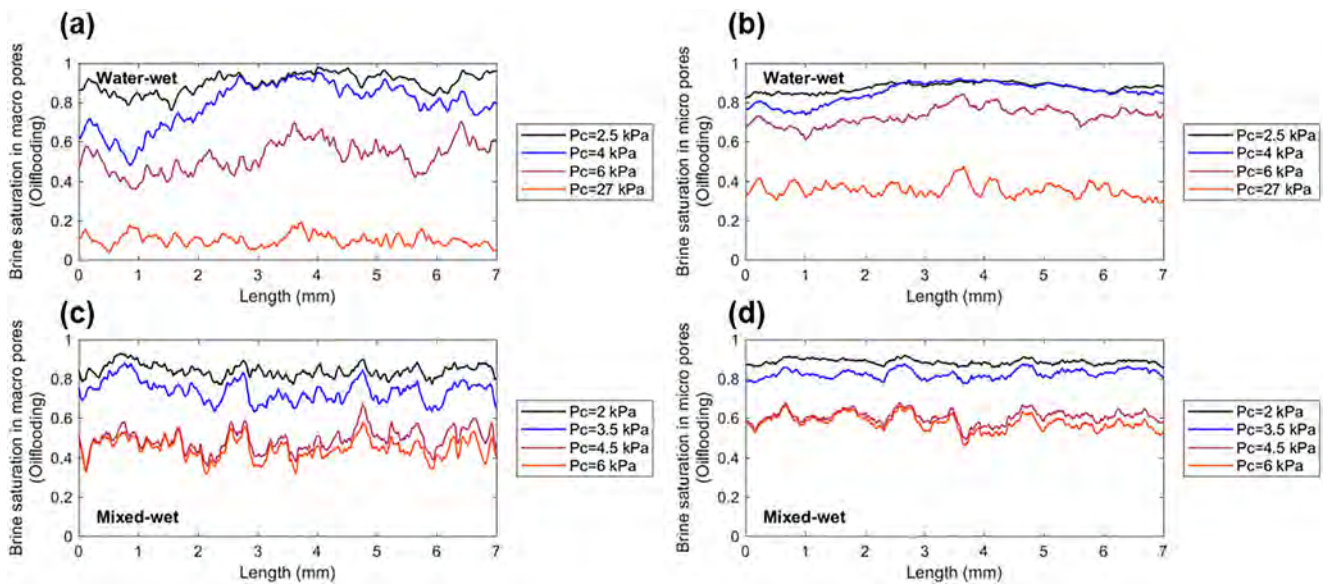


Figure 3. Average brine saturation distribution during the oil flooding, in slices perpendicular to the flow direction within macropores (left) and micropores (right) for water-wet and mixed-wet samples.

Wettability reflects the ability or tendency of one fluid to spread on the surface of a solid phase when there are other immiscible fluids in the system. It is usually characterized by the contact angle. In this work, an automated geometric contact angle measurement algorithm (AlRatrouf et al., 2018a) was applied on segmented multiphase images to quantify geometric contact angle in macropores for both samples. Similar to aforementioned curvature measurements, in this algorithm a Gaussian smoothing is applied to the surface mesh to remove interfaces with only a few voxels and eliminate staircase-like artifacts before measuring the contact angle, which means that not all macropores were calculated here. Note that there are no values in the microporosity with this method.

3. Results and Discussion

In the following, we first describe the fluid distributions and quasi-static filling processes observed in the pore space based on the micro-CT images. Then, the wetting state and the network characteristics were analyzed to understand the underlying mechanisms of the complex fluid invasion behavior. Finally, the simulations on multi-scale PNMs were performed to link the pore-scale displacement to the fluid flow properties.

3.1. Pore Filling Processes

The brine saturation profiles along flow direction in both macro- and microporous regions at each oil flooding pressure step are shown in Figure 3. Because of the porous plates and slow injection rates, the saturation profiles present a relatively homogeneous distribution. For the water-wet case, the brine saturation dropped dramatically with pressure increase, presenting a relatively uniform distribution at the highest pressure. At this point, there was a high brine saturation (41.29%) in the micro-pores. This was five times as high as the brine saturation in the macropores at the end of oil flooding. Under mixed-wet condition, the brine saturation in the micro-pores was also higher than in the macropores at all pressure steps, but the difference was smaller. This indicates weakly water-wet conditions in the microporosity.

Figure 4 shows the evolution of the brine and oil clusters in macropores of the water-wet sample. During the oil invasion sequence (Figure 4a), the oil found a main flow path and formed several large clusters in the macro-pore space first, followed by occupying more and more pores, while the brine phase gradually appeared more isolated. For a water-wet porous medium, the typical displacement mechanism during oil flooding is a series of Haines jumps (Burst flow) (Berg et al., 2013; Bultreys, Boone, et al., 2015; Bultreys, Van Hoorebeke, & Cnudde, 2015), that is, a sudden rapid fluid interface movement through a local constriction in the pore space, due to the dependence of the equilibrium capillary pressure on the channel radius. As we aim to study the fluid distribution after a

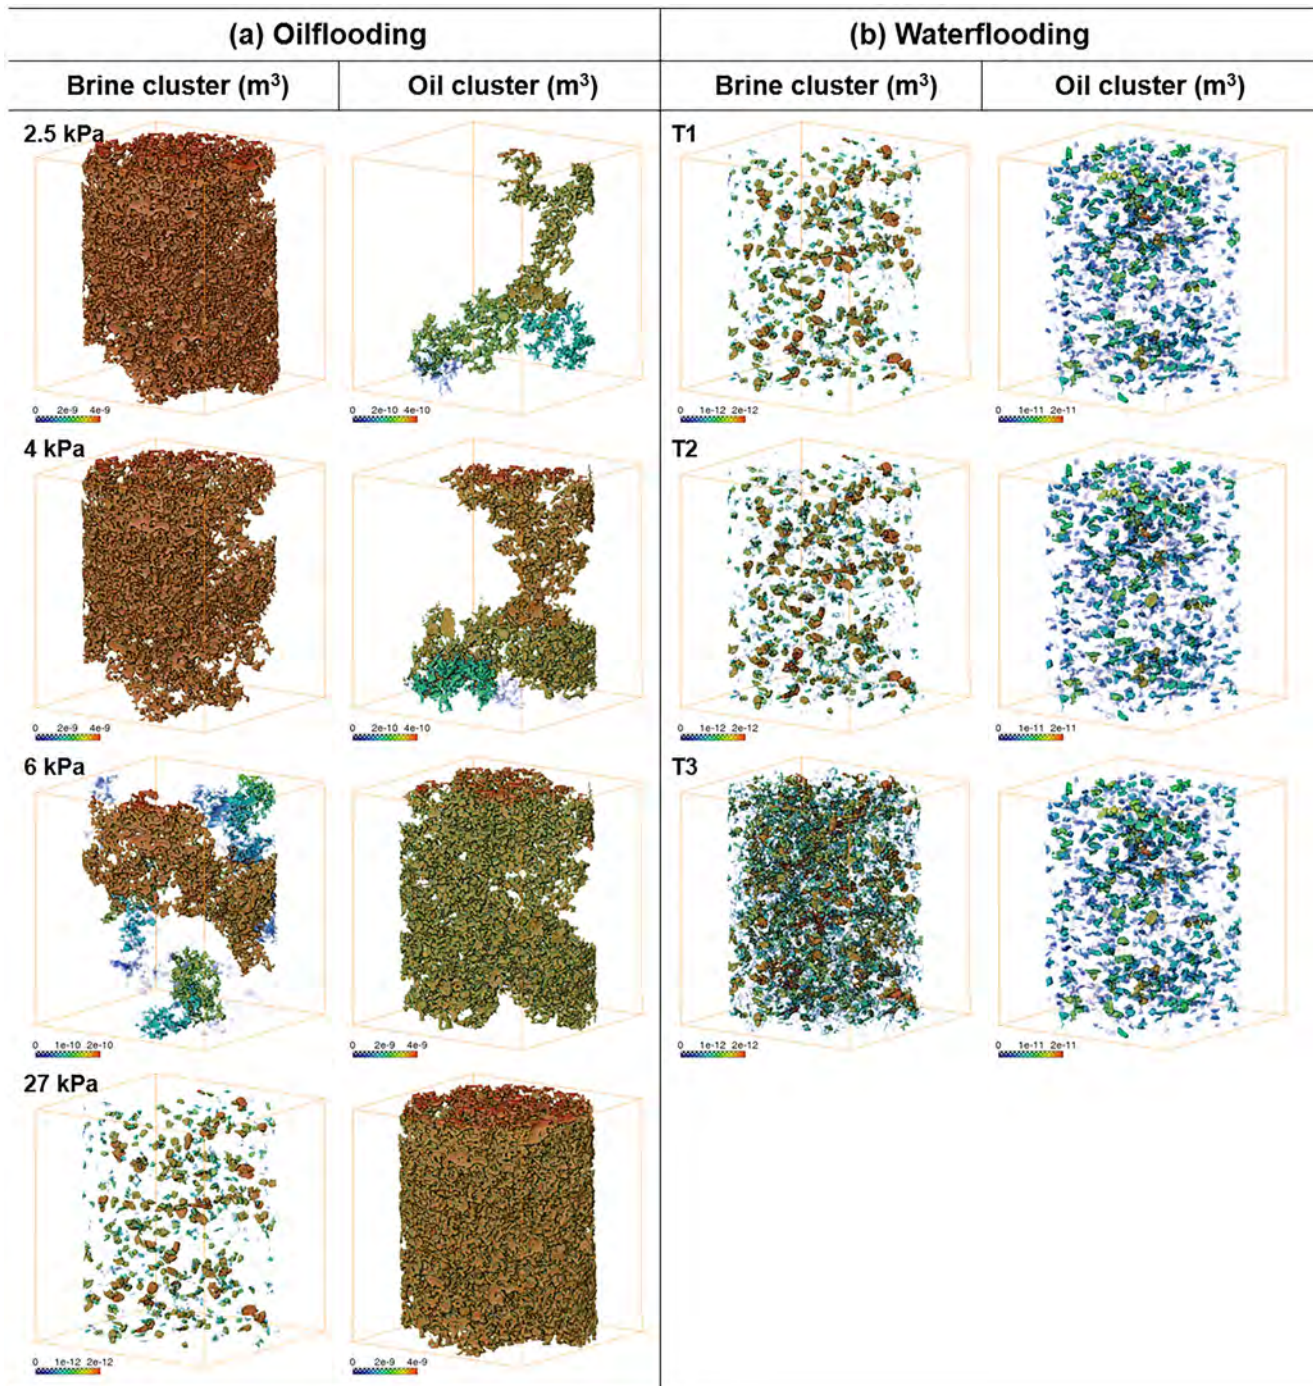


Figure 4. Fluid cluster changes in macropores of the water-wet sample during (a) oilflooding and (b) waterflooding. The color shows cluster volume (m³).

period of equilibration at certain set capillary pressures, the images only reflect the fluid filling state after many of these events. The branched structure connecting large pores together is consistent with a capillary fingering type fluid distribution pattern that results from successive Haines jumps (Blunt et al., 1992; Herring et al., 2014).

In the water-wet sample the waterflooding that followed the oilflooding increased the brine saturation in the macroporous region from 8.5% to 22.7%, compared to that in the micropores increasing from 50.7% to 79.3%. It is clear that in the resolved pore space (Figure 4b), brine preferentially entered pores or throats with smaller sizes. In this process, brine films residing in the corner or crevices of pores/throats at the end of oilflooding started to

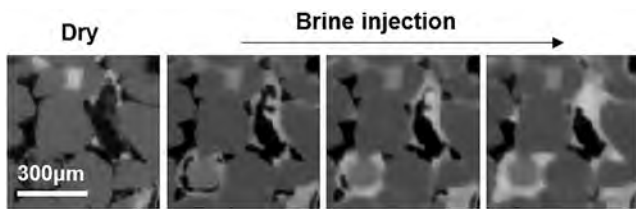


Figure 5. Example of two-dimensional views of oil phase trapping in pores under water-wet condition.

swell with the decrease of capillary pressure, causing the interface configuration to become unstable when films on opposing sides of the pore surface touched each other. On the micro-CT images, we could clearly see a large amount of trapping due to snap-off, such as the example shown in Figure 5.

For the mixed-wet case, on the other hand, the brine was displaced even at low pressures during oil flooding. More small-volume brine clusters resided in the pore space, keeping the brine connected, see Figure 6a. The oil injection in the resolved pores of the mixed-wet sample was different from the water-wet case: it tended to enter oil-wet or weakly water-wet pores at the beginning of the displacement rather than filling the pores in order of their size (Scanziani et al., 2020). The oil cluster volume distribution was therefore

much smaller than in its water-wet counterpart: for example, the largest oil cluster volume at 6 kPa was 14% of the macropore volume for water-wet (7.32 mm^3) and 2% of the macropore volume (0.59 mm^3) for mixed-wet. During waterflooding of the mixed-wet sample, the brine saturation increased by only 3% in macropores, and brine and oil cluster size distribution did not change significantly (Figure 6b). While that in micropores showed a 5% increase. Compared to a sudden increase of brine saturation in micropores of water-wet sample when the waterflooding started, that change in micropores of mixed-wet case was much lower.

In comparison with the conventional pore filling phenomena for water-wet conditions, the fluid flow mechanisms in the mixed-wet sample appeared to be more complex (Figure 7). The micro-CT images showed that the fluid occupancy of most macropores made a step change from a certain pressure step to the next. However, “gradually filling” events described by Mascini et al. (2021) were also observed. This manifested itself in pores where terminal menisci appeared to be quasi-stable everywhere while the three-phase contact line passed through it. Each such pore was thus only partially invaded in between consecutive pressure steps. The menisci in such pores remained present for multiple pressure steps at intervals of more than either 12 or 6 hr (respectively for oilflooding and waterflooding). The menisci curvatures gradually increased or decreased with the imposed capillary pressure, reflecting the local capillary pressure change. By detecting the interface movement at each pressure step during the experiment, 3.4% of the macropores in oilflooding and 2.8% of the macropores in waterflooding were found to reflect “gradually filling” phenomena, where these pores accounted for 13% of the macropore volume. For convenience, we will refer to these as “gradually filling pores” and to the others as “capillary instability pores” in the following sections.

The morphology of the fluid menisci in gradually filling pores was markedly different from the water-wet case, leading to three observations. The first observation is that the invading and retreating of fluid in some pores can be approximated as a reversible process. As shown in pore A (Figure 7a), the invading meniscus changed from a convex to a flat interface during oil injection, and then bulged into oil again with the decrease of pressure, during which the negative principal curvatures dominated over positive principal curvatures. The second observation is a near flat front at the end of each oil flooding step in several pores (as shown in Figure 7b), indicating intermediate-wet conditions. The third observation is that the oil flooding behavior in certain pores (Figure 7c) were distinct from that seen in the water-wet case, where the large pores and throat were preferentially invaded by the oil phase, followed by those with smaller sizes and finally microporosity, as these had high capillary invasion pressures. To investigate this, we divided the microporosity near pore C in Figure 7c into two regions and tracked their gray value change. This showed that there was a significant decrease of brine saturation in microporous region 2 compared to that in the microporous region 1. Furthermore, the brine was completely displaced out of pore C while its saturation in microporous region 1 was still high. This is likely due to the effect of wettability, which impacted the order of filling here. This hypothesis will be further analyzed in the next section.

Overall, this section clearly shows that the fluid displacement behavior in both the 3D network and in a single pore are markedly different in the untreated and treated rock samples. Further analysis on wettability distribution and the neighboring network characteristics of pores in treated sample will be presented in the following sections to point out the possible causes.

3.2. Wettability Characterization

For the resolved macropores, the wettability can be quantified by measuring the contact angle. Figure 8a shows the results of geometric contact angles that were measured on full, segmented micro-CT images at the last

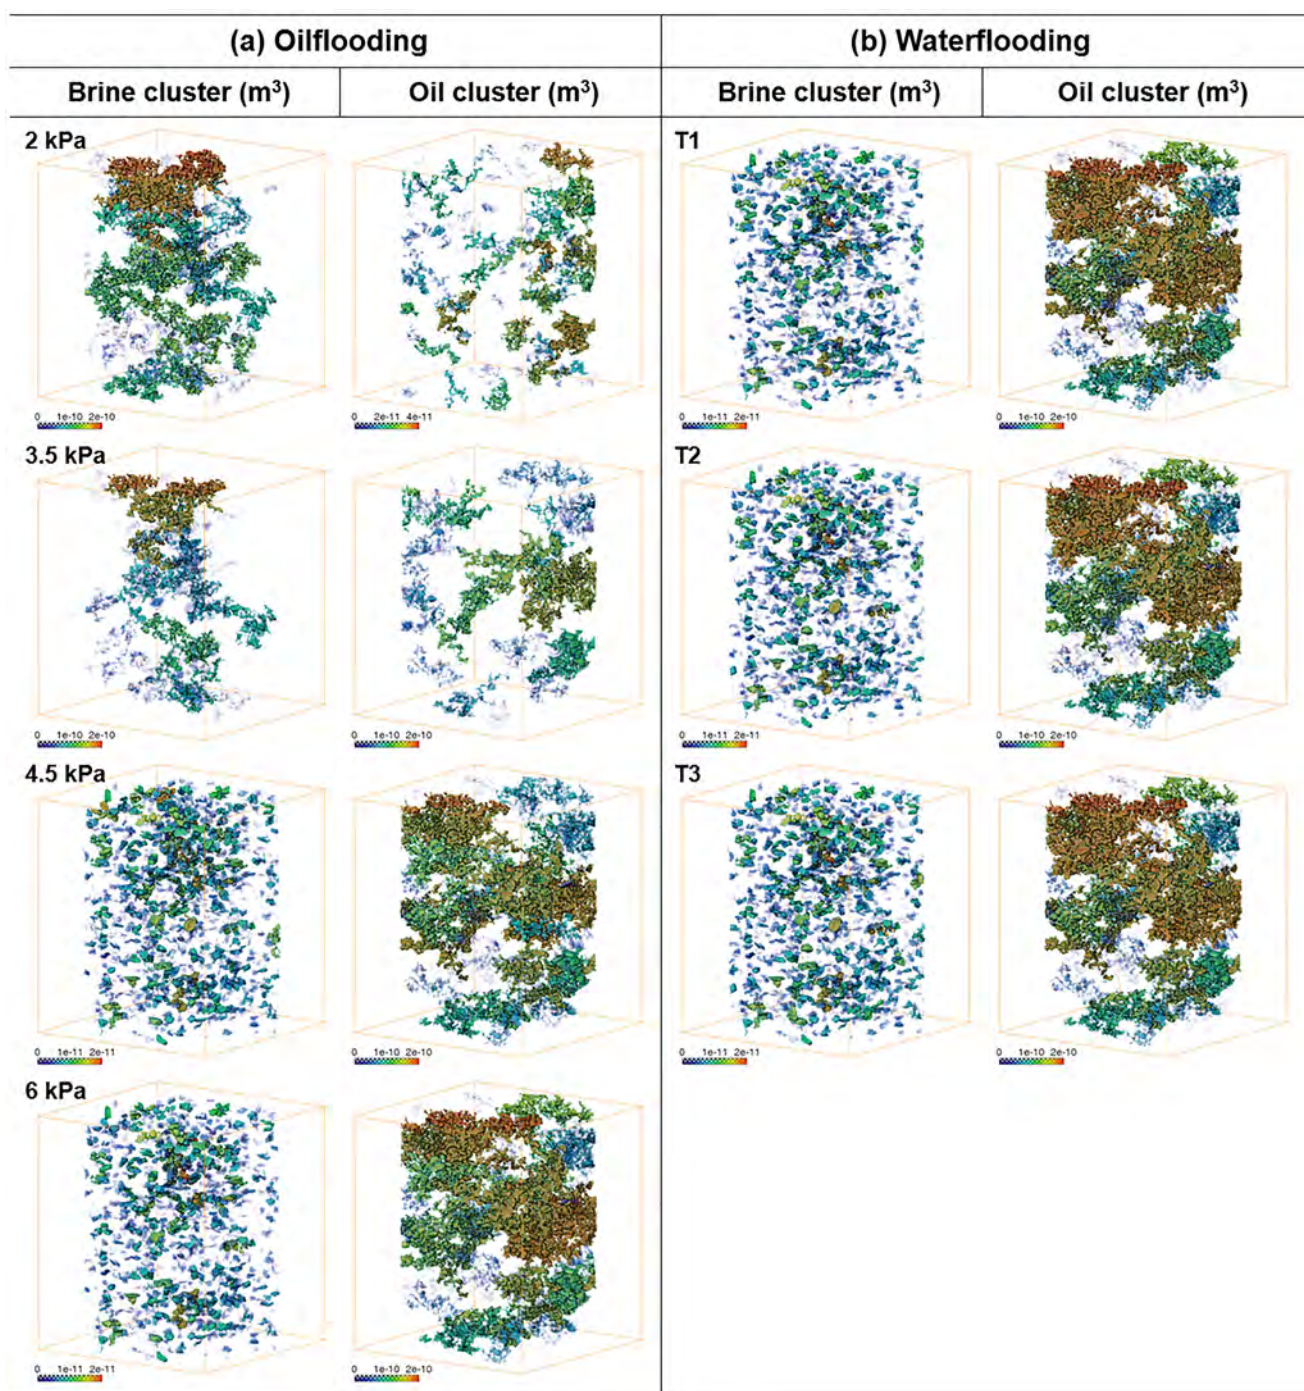


Figure 6. Fluid cluster changes in macropores of the mixed-wet sample during (a) oilflooding and (b) waterflooding. The color shows cluster volume (m^3).

waterflooding step. The untreated and treated samples had a mean contact angle of 69.23° and 95.50° respectively. The treated sample had a contact angle distribution with a very broad range of values above and below 90° , implying a mixed-wet state, while the contact angle distribution of the untreated sample implied weakly water-wet conditions. Because the contact angle was calculated based on three-phase contact lines extracted from the micro-CT images, the image resolution, selection of filtering methods and segmentations affected measurements. In addition, the roughness of the pore surfaces in these samples may also have been a key factor leading to wide range of contact angle, due to contact angle pinning and hinging that is not picked up in static measurements (AlRatrou et al., 2017). To investigate the wettability in gradually filling pores, Figure 8b presents the contact

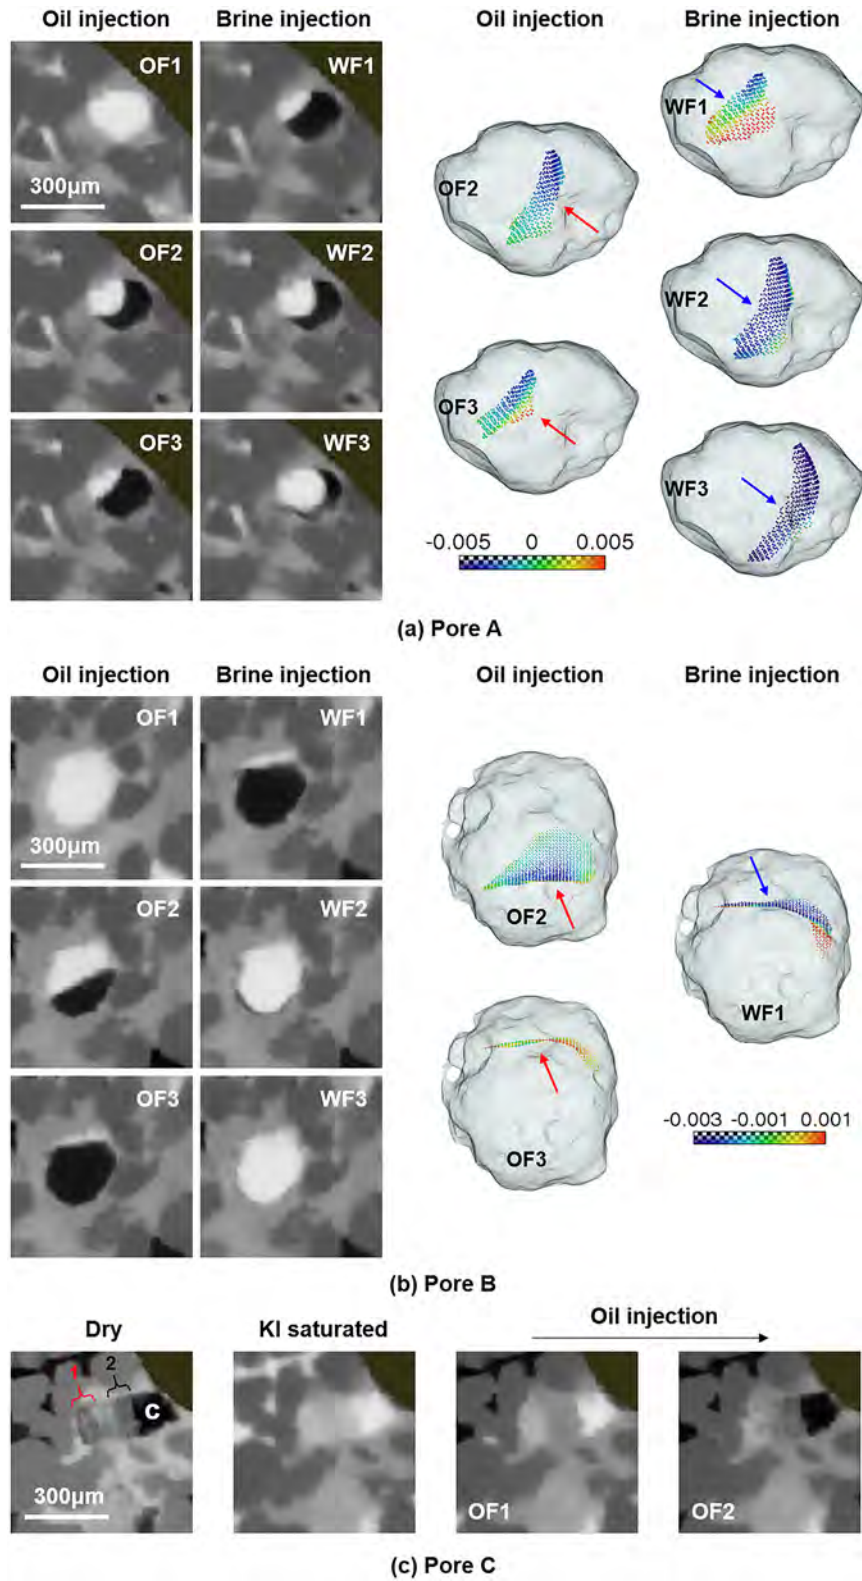


Figure 7.

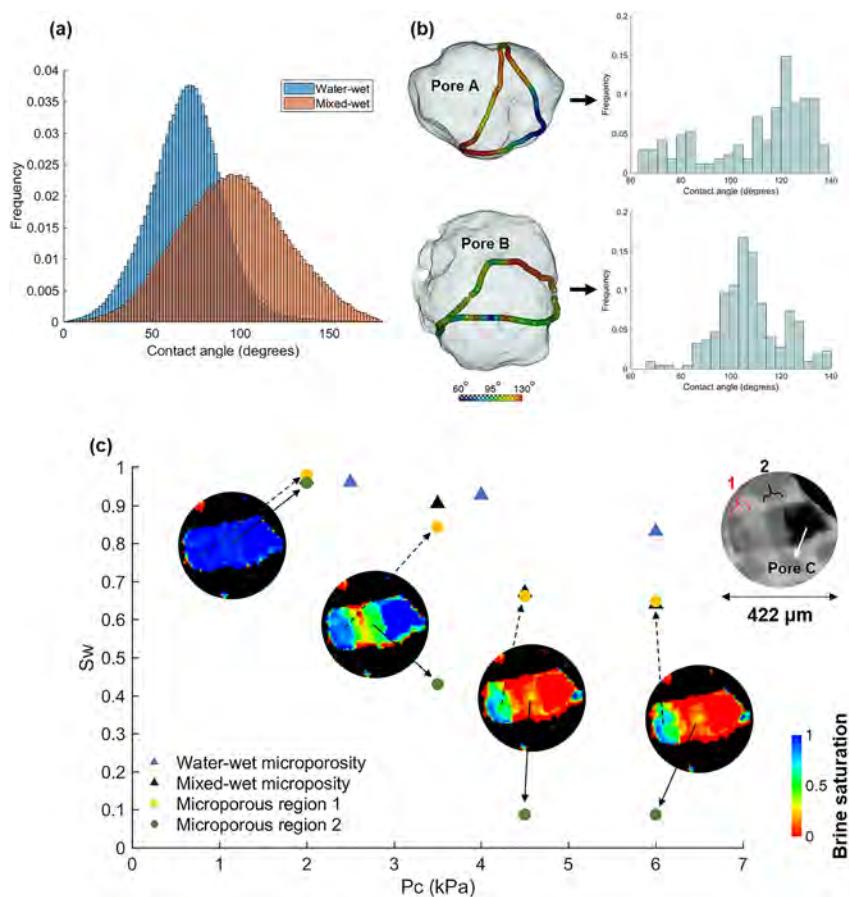


Figure 8. (a) Histogram of geometric contact angles measured on images after waterflooding under both conditions. (b) Example of contact angle distribution on pore A (top) and pore B (bottom) under mixed-wet condition and the corresponding distribution histograms. (c) Estimation of the wettability of the microporosity based on saturation change. Note that the saturation mentioned here is the average brine saturation in the microporous phase of the whole sample (triangle symbol) and in the specific microporous regions (circular symbol) in the oilflooding process. The four circular images show the saturation distribution map in microporous region 1, microporous region 2, and pore C at different pressure steps.

angle distribution on pore A and pore B (micro-CT images are shown in Figure 7a) extracted from the mixed-wet sample (an example of contact angle distribution in a water-wet pore is shown in Figure S2 in Supporting Information S1). Typically, the fluid meniscus remains concave (oil bulging into brine) in water-wet pores, and is convex (brine bulging into oil) in oil-wet pores. However, the wettability of the pore surfaces shown here was very heterogeneous, appearing to be partially water-wet and partially oil-wet. The complex interaction between contact angle and pore space geometry led to a variation in the interface morphology, resulting in both negative (i.e., brine bulging into oil direction) and positive (i.e., oil bulging into brine direction) mean interfacial curvatures occurring on the same fluid meniscus (see colored dots shown in 3D pores in Figure 7). Therefore, the movement of the invading phase in these mixed-wet pores might be inhibited temporarily, but facilitated at the next time step, resulting in complex invasion behavior in the pore space.

For the unresolved micropores, it is impossible to measure the contact angles directly, because the fluid interfaces are not resolved. We therefore estimated the wetting state of the microporosity by quantifying the evolution of its saturation based on the saturation maps from differential imaging. Figure 8b shows an example of the application of this method on microporous regions (the division of each region is shown in Figure 7c) near pore C.

Figure 7. Examples of fluid invasion in pores of mixed-wet sample. (a) Oil-brine interfaces variation during oil and subsequent waterflooding in pore (a). The figures on the left are 2D slices on X-Y plane. The figures on the right indicate the interfaces movement and the mean curvature distribution (colorful dots on interfaces) in 3D transparent pore space. The red and blue arrows show invasion direction of oil and brine phases, respectively. (b) Movement of a flat shape interface on a 2D slice of pore B in oilflooding and waterflooding. (c) Invasion of oil phase from microporous region to a macropore C in oilflooding. The microporous phase is divided into two regions according to their gray value change in oilflooding process.

The decrease of brine saturation at each pressure step in the microporous regions of the water-wet sample were very small, indicating that they were strongly water-wet: in this case, the filling follows the order of pore size. However, the wettability of the microporosity in the mixed-wet sample was more complicated, and it proved difficult to define a single wetting state obtained from an average result to describe its characteristics. In the microporous regions that neighbor pore C shown in Figure 7c, the saturation in region 2 decreased strongly, while that in region 1 was comparable to the average value of the whole microporous phase. Considering that the saturation in pore C decreased to 0 already at a lower pressure (4.5 kPa), pore C is expected to be more hydrophobic than microporous region 1. Therefore, we estimate that the latter is weakly water-wet or weakly oil-wet and that microporous region 2 is strongly oil-wet. This means the pore size was likely not the dominating factor for the filling sequence in the mixed-wet sample.

3.3. Pore Network Characteristics

3.3.1. Multi-Scale Pore Network Extraction

Extracting PNM from micro-CT images is an important tool to better understand the characteristics of the pore space (Bultreys, Boone, et al., 2015; Bultreys, Van Hoorebeke, & Cnudde, 2015). The goal is to simplify some of the network's complexity while its salient characteristics such as topology and geometry are preserved. Because the samples used in this study presented multi-scale features with both resolved macropores and unresolved micropores (i.e., pores below image resolution), and the microporosity can play a key role in making the fluid flow behavior complex as stated in previous section for the mixed-wet case, a state-of-the-art of the multi-scale modeling technique (Ruspini et al., 2021) was used here. While direct multi-scale simulators are being developed (Soullaine et al., 2016; Zhang et al., 2016), multi-scale PNM are currently still one of the only models that allow to incorporate the microporosity characteristics on fairly large image sizes for this type of complex samples. The extraction algorithm simplified the pore geometry into four types of network elements: pore bodies and pore throats representing local dilations and constrictions in the macroporous space, and Darcy nodes and links corresponding to the (unresolved) microporosity phase treated as a continuum porous medium. The model was constructed based on a 3D porosity map and a 3D rock type map (i.e., different flow zones for the unresolved regions). Individual pore networks for the resolved pores and each of the rock types were extracted first and then merged into a single multi-scale PNM by creating a virtual link in the contact area between pores from different, neighboring zones. The porosity map was used to determine the local porosity in each element, and each flow zone on the rock type map was assigned different multiphase flow properties in the simulation process (the details will be described in the next section).

The porosity distribution information is shown in Figure 9a and Table 1. The total porosity was 18.11% and 15.14% for the water-wet and mixed-wet cases respectively. More than 30% of the samples' volume fractions were made up of microporous voxels in both cases, and their contribution to total porosity was equally important as the macropores. Therefore, the presence of microporosity increases the complexity of the pore space architecture, which may play an important role in the multiphase flow. For the determination of the rock type map, we introduced a method based on micro-CT images of obtained during capillary pressure experiments in (Wang et al., 2022). The method was validated to be a promising approach in decreasing the uncertainty of modeling, and was therefore used here. In this method, the saturation and the corresponding capillary pressure of each microporous voxel in the sequence of experimental images were first fitted using a Brooks-Corey-type P_c formulation (Brooks & Corey, 1966) to obtain the invasion-capillary-pressure (P_{ct}) distribution map of the sample. Then, thresholds determined by k-means clustering were applied on the P_{ct} map to divide the microporous region into three rock types for both samples, see Figure 9b.

It should be noted that in this study, the goal was to use the multi-scale PNM method to understand the connectivity structure of the sample, and to try to estimate how it may influence the flow behavior, rather than using it as a predictive simulation tool which aims to perfectly match the experiments or predict properties.

3.3.2. Network Characteristics Around Gradually Filling Pores

According to the network model of the mixed-wet sample, we obtained the coordination number (CN) of 77, 139, and 90 for pore A, pore B, and pore C respectively (micro-CT images are presented in Figure 7). The CN reflects the amount of neighbors each pore has. The CN of pore B only consisted of Darcy links, which means pore B was disconnected from all resolved pores and only connected by unresolved pores. The average microporosity around

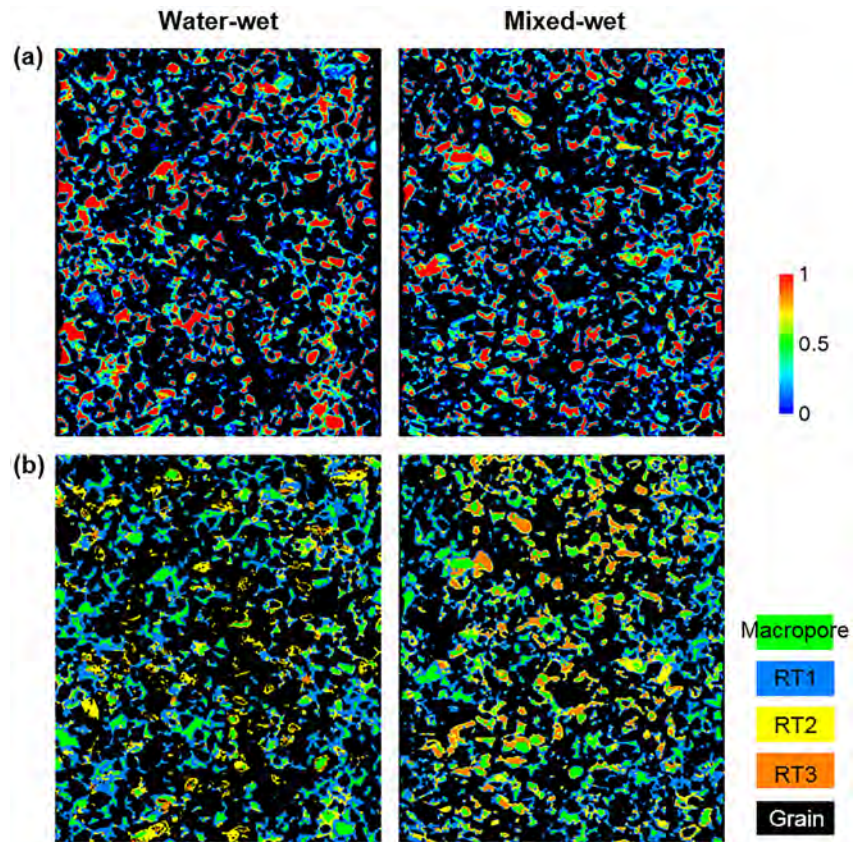


Figure 9. (a) Porosity distribution maps for water-wet (left) and mixed-wet samples (right). (b) Rock type maps for water-wet (left) and mixed-wet samples (right). On the rock type maps, the macropore region and solid grain are shown in green color and black color, respectively. The RT1, RT2, and RT3 refer to three microporous regions with invasion capillary pressures from low to high values.

pore B was 0.46. For pore A and pore C, more than 97% of the CN were Darcy links (i.e., only 2 resolved throats around pore A and 3 resolved throats around pore C) with average microporosity of 0.46 and 0.57 respectively. Especially in pore C, the average aspect ratio (the ratio of pore body size to pore throat size) of the resolved throat configuration was very high (4.59). This likely explains the two crucial roles of microporosity in gradually filling event: (a) slowing down the pore-scale invasion, (b) maintaining the connectivity of multiphase flow through complicated pore space, especially in the isolated macropores. This may also be a possible reason why this invasion process was not reported in other relatively homogeneous mixed-wet media (Scanziani et al., 2020).

3.4. Influence of Gradually Filling Event on Flow Properties

Quasi-static PNM (such as the one used here) by definition do not allow to simulate the dynamics of multiphase flow, for example, the slow movement of the fluid menisci in the pores. These models assume that the capillary forces play a dominant role in controlling the invasion order of fluids in the pore space, so that the macropores change fluid occupancy in a single pressure or saturation step, while the influence of viscous forces on the displacement sequence are entirely neglected. Dynamic models, on the other hand, are computationally much more complex, and are therefore difficult to use in the complex samples investigated here. To nevertheless study the sensitivity of flow properties to gradually filling pores, we established two quasi-static models with different network structures for the mixed-wet sample. Model A was already introduced in Section 3.3.1; this was a conventional multi-scale

Table 1
Porosity and Volume Fraction of Each Phase in the Samples

Sample	Phase	Average porosity	Volume fraction	Contribution	Total porosity
Water-wet	Macropore	1	0.0954	0.0954	0.1811
	Micropore	0.2756	0.3109	0.0857	
	Solid grain	0	0.5937	0	
Mixed-wet	Macropore	1	0.0741	0.0741	0.1514
	Micropore	0.2554	0.3027	0.0773	
	Solid grain	0	0.6232	0	

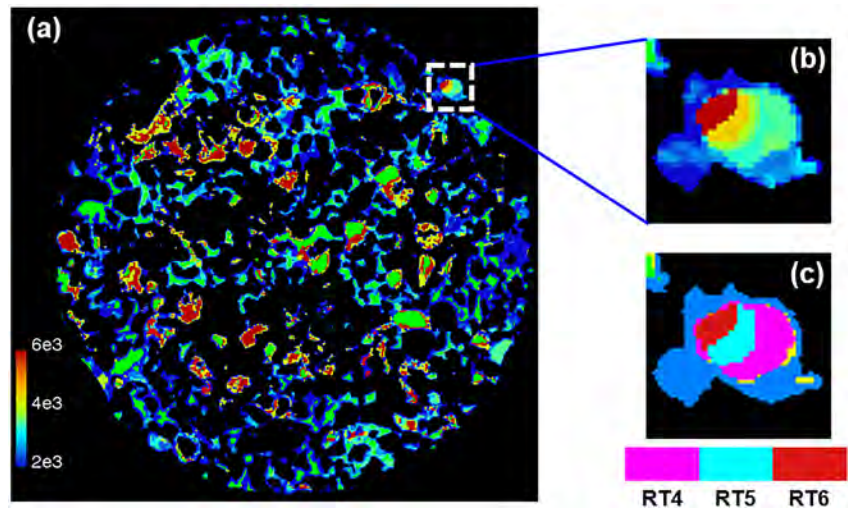


Figure 10. (a) A slice of invasion capillary pressure distribution on X - Y plane of the mixed-wet sample. The “capillary instability pores” are marked in green. (b) A zoom in view of “pressure distribution” in pore (a). Note that the pressure in “gradually filling pores” does not have the same meaning as in the microporosity. It only represents the moving sequence of fluid-fluid interfaces in macropores, that is, “low pressure region” is invaded first, followed by the “high pressure region.” (c) An example of “rock typing” results for pore A in model (b). The segmentation of RT1-RT3 in model B is the same as model A, see Figure 9b. The RT4, RT5, and RT6 represent gradually filling zones.

PNM without considering “gradually filling” behavior in certain macropores. It included 1 macropore phase, three types of microporous flow zones and 1 solid grain phase. In model B, gradually filling macropores were treated as “microporosity”: we applied the aforementioned “rock typing” method on them to divide a single macropore into different flow zones (Figure 10). It should be noted that the goal was to make the effective behavior of the quasi-static PNM similar to the experiment without including the detailed physics of the process. To differentiate the fluid invasion mechanism in microporosity and in gradually filling macropores in the model, the properties for gradually filling regions were user-defined so as to obtain a gradual filling here. The model can only be expected to give a coarse estimate of what the inclusion of this behavior on the simulation would be, rather than provide accurate ab-initio prediction results. As shown in Figure 10c, each flow zone was assigned an invasion capillary pressure according to the segmentation thresholds, which means the zone would be invaded by oil phase when the injection pressure reached this pressure. This way, we simulated the effect of the “gradual filling” process in macropores. This model contains 1 macropore phase, 3 microporous flow zones, 3 gradually filling zones, and 1 solid grain phase.

The input petrophysical properties for each rock type included capillary pressure curve (P_c -curve), relative permeability (k_r -curve) and permeability. The input P_c -curve was completely based on our experimental data (for more details regarding this procedure, we refer to our previous publication (Wang et al., 2022)). The k_r -curve was obtained based on the Brooks-Corey model. A power correlation $k = a \cdot \varphi^b$ was used to determine the permeability for each node in the model, where we fixed the parameter b and tuned the parameter a until the output P_c -curve matched the experimental data (Ruspini et al., 2021). The contact angles were randomly drawn from a Gaussian distribution in the range of 10° – 160° to mimic the complex wetting state of the sample. All the aforementioned parameters were the same for two models, except that in model B, the permeability of the gradually filling pores was assigned from a very small value (i.e., Case 1 in Figure 11a) to a very large value (i.e., Case 2 in Figure 11a). This is meant to perform a sensitivity study on the importance of these pores on the flow, by mimicking that these pores are open for flow or that their contribution to the flow is negligible. In this test, we only simulated the oil flooding process. The properties of the models for mixed-wet sample are shown in Table 2.

The results showed that the absolute permeability of model A was 29.86 mD. For model B, as shown in Figure 11a, the absolute permeability of the sample remained approximately stable when the permeability of gradually filling pores was set lower than 1 mD or higher than 100 D, presenting an S-shape in the semilog coordinates. The total effect of gradually filling pores on the permeability of the sample was therefore 6 mD, approximately 19% of the maximum value. Figure 12 shows the comparison of the P_c -curves and the k_r -curves simulated by different

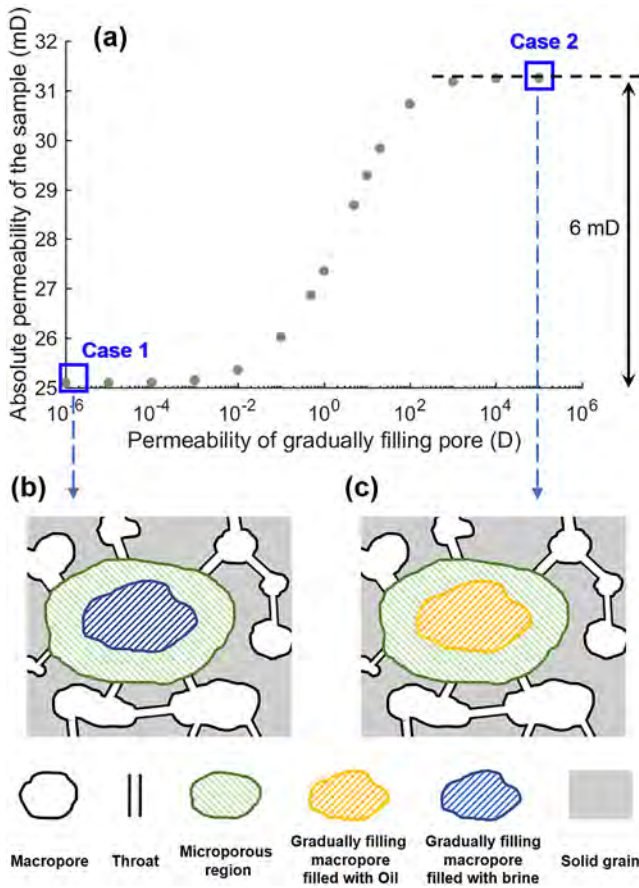


Figure 11. (a) Simulation results of the input permeability value for gradually filling pores and the absolute permeability of the sample. (b) Diagram of the gradually filling pore blocked by brine at very low permeability condition during two phase flow. (c) Diagram of the gradually filling pore blocked by oil at very high permeability condition during two phase flow.

models. All Pc-curves had a good match with the experimental data and there is very little difference between the two models. The former was due to the fact that the input Pc-curve for Darcy pores were scaled with their porosity and permeability. The kr-curves indicated that gradually filling pores may affect the relative permeability of the brine phase, but that their effect is small. As depicted in Figures 11b and 11c, the gradually filling pores were surrounded by micropores, which provided their connection with the other macropores and throats. During the oil flooding process, the case where the gradually filling pores had very low permeability (Case 1) simulated that these pores were fully occupied by brine and the oil could not enter. This provided more flow paths for the brine, thus the brine relative permeability was higher. If their permeability was very high (Case 2), the invading oil would pass through these pores easily, causing the brine to lose connected pathways, causing the brine relative permeability curve to decrease. As the model used in this study did not take into account the rate effects on the relative permeability, further developments in dynamic simulations are needed to fully investigate the results presented here.

4. Conclusions

We present an experimental workflow based on X-ray micro-CT to study fluid invasion behavior in heterogeneous rocks with different wettability via quasi-static oil- and waterflooding. We observed typical oil phase trapping in macropores of a water-wet sample during waterflooding, while in its mixed-wet counterpart, some macropores were observed to be filled gradually compared to others that were completely occupied by invasion fluid in a single pressure step. This occurred during both oil flooding and water flooding. To understand why and how the gradually filling pores behave under mixed-wet conditions, we analyzed the wettability and pore network characteristics. We introduced a new approach to perform a sensitivity study of the impact of the slow displacements on the multiphase flow properties, using a state-of-the-art multi-scale PNM.

We quantified the wettability of macropores in each sample by measuring the contact angle on multiphase micro-CT images, and found that the gradually filling pores in mixed-wet case had a high degree of wetting heterogeneity on their pore walls, presenting partially water-wet and partially oil-wet regions. This may alternately inhibit and facilitate the movement of invading phase at different times during displacement, resulting in complex invasion behavior in the pore space. In this

Table 2
Properties of the Multi-Scale PNMs for Mixed-Wet Sample

Properties	Model A	Model B-case 1	Model B-case 2
Components in rock type map	1 macropore phase 3 microporous flow zones 1 solid grain phase	1 macropore phase 3 microporous flow zones 3 gradually filling zones 1 solid grain phase	
Resolved nodes	60,219	64,203	
Resolved links	22,413	19,470	
Darcy nodes	550,235	562,683	
Darcy links	3,007,014	3,090,083	
Input permeability for gradually filling pores (D)	–	0.000001	100,000
Absolute permeability of the sample (mD)	29.86	25.10	31.26

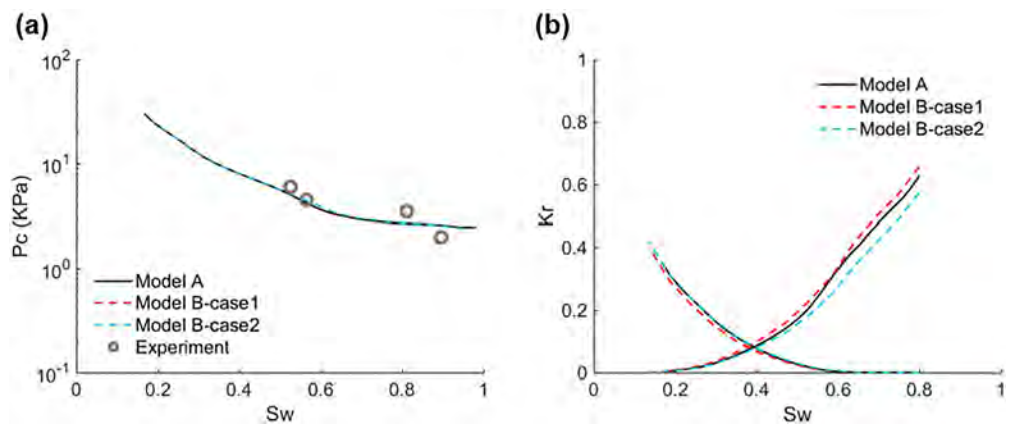


Figure 12. Results of oilflooding simulations. (a) Comparison of capillary pressure curves from the two models and the experiment. (b) Relative permeability curves of the two models.

study, the wettability of the microporosity was evaluated by quantifying its saturation, shedding new light on the slow displacements first characterized by Mascini et al. (2021). The results indicated that the mixed wettability impacted the pore filling sequence and increased the complexity of multiphase flow. To mimic the slow movement of menisci in the model and the importance of this factor in flow simulation, we constructed two multi-scale PNMs. One was a conventional model with macropore phase, solid grain phase and three microporous flow zones classified by fitting saturation and capillary pressure of each voxel. It showed that the gradually filling pores presented a high CN, and more than 97% of the CN was contributed by micro-elements. This proved that the microporosity provided the “supply chain” for the gradually filling pores, which on one hand slowed down the pore-scale invasion and on the other hand maintained the connectivity of fluids in those macropores. The second model had the same segmentation of “capillary instability pores,” microporous phase and solid grain as the previous model, except that the gradually filling macropores were divided into distinct invasion zones to mimic their slow filling. The results showed that the total effect of gradually filling pores on the permeability of the sample was 6 mD (approximately 19% of the maximum value), but that their influence on the relative permeability may be smaller. This needs to be further investigated with dynamic simulations to provide a definite answer. It should be noted that experiments on more samples with different pore geometries and wettability structures are required to generalize this result. Furthermore, the limited spatial and temporal resolution used in this work may lead to underestimation of realistic gradually filling pores, which means further studies making use of for example, synchrotron facilities and direct numerical simulations are needed to fully understand the mechanisms of this phenomenon and quantify its influence.

In general, our work demonstrates that the fluid filling process in heterogeneous porous media is strongly correlated with wetting state and multi-scale pore space structures. The methodologies presented here can be extended to other geological materials for better modeling and simulation of multiphase flow in porous media. Further work is needed to clarify how the mixed wettability distribution obtained with the chemical wettability alteration method used here compares to specific cases in reservoirs and aquifers, including “aging” by contact with crude oil or non-aqueous phase liquids. This is particularly the case for situations where the alteration takes place on surfaces exposed to oil but not on those exposed to water (Kovscek et al., 1993).

Data Availability Statement

The data set used in this research is made available at <https://doi.org/10.17612/85EB-GV32> (Wang et al., 2023).

References

- Al-Futaisi, A., & Patzek, T. W. (2004). Secondary imbibition in NAPL-invaded mixed-wet sediments. *Journal of Contaminant Hydrology*, 74(1–4), 61–81. <https://doi.org/10.1016/j.jconhyd.2004.02.005>
- Alhammadi, A. M., Gao, Y., Akai, T., Blunt, M. J., & Bijeljic, B. (2020). Pore-scale X-ray imaging with measurement of relative permeability, capillary pressure and oil recovery in a mixed-wet micro-porous carbonate reservoir rock. *Fuel*, 268, 117018. <https://doi.org/10.1016/j.fuel.2020.117018>

Acknowledgments

Shan Wang would like to acknowledge the China Scholarship Council (CSC Grant 201906440157) for PhD support. Tom Bultreys is a senior postdoctoral fellow of the Research Foundation–Flanders (FWO) and acknowledges its support under Grants 12X0919N and 12X0922N. The special research fund of the Ghent University (BOF-UGent) is acknowledged for the financial support to the UGCT Centre of Expertise (BOF.EXP.2017.0007). We also acknowledge partial funding from the Research Foundation–Flanders (FWO, Projects G051418N and G004820N). Leonardo Ruspini would like to acknowledge “Norges Forskningsrådet” (Grant 296093) for partial support to this research.

- AlRatrou, A., Blunt, M. J., & Bijeljic, B. (2018a). Spatial correlation of contact angle and curvature in pore-space images. *Water Resources Research*, 54(9), 6133–6152. <https://doi.org/10.1029/2017WR022124>
- AlRatrou, A., Blunt, M. J., & Bijeljic, B. (2018b). Wettability in complex porous materials, the mixed-wet state, and its relationship to surface roughness. *Proceedings of the National Academy of Sciences of the United States of America*, 115(36), 8901–8906. <https://doi.org/10.1073/pnas.1803734115>
- AlRatrou, A., Raeini, A. Q., Bijeljic, B., & Blunt, M. J. (2017). Automatic measurement of contact angle in pore-space images. *Advances in Water Resources*, 109, 158–169. <https://doi.org/10.1016/j.advwatres.2017.07.018>
- Andrew, M., Bijeljic, B., & Blunt, M. J. (2014). Pore-scale contact angle measurements at reservoir conditions using X-ray microtomography. *Advances in Water Resources*, 68, 24–31. <https://doi.org/10.1016/j.advwatres.2014.02.014>
- Batchelor, B. G., & Waltz, F. (1993). Principles of digital image processing: Core algorithms. In *Interactive image processing for machine vision*. Springer Science & Business Media. https://doi.org/10.1007/978-1-4471-0393-6_2
- Berg, S., Ott, H., Klapp, S. A., Schwing, A., Neiteler, R., Brussee, N., et al. (2013). Real-time 3D imaging of Haines jumps in porous media flow. *Proceedings of the National Academy of Sciences of the United States of America*, 110(10), 3755–3759. <https://doi.org/10.1073/pnas.1221373110>
- Blunt, M. J., King, M. J., & Scher, H. (1992). Simulation and theory of two-phase flow in porous media. *Physical Review A*, 46(12), 7680–7699. <https://doi.org/10.1103/PhysRevA.46.7680>
- Blunt, M. J., Lin, Q., Akai, T., & Bijeljic, B. (2019). A thermodynamically consistent characterization of wettability in porous media using high-resolution imaging. *Journal of Colloid and Interface Science*, 552, 59–65. <https://doi.org/10.1016/j.jcis.2019.05.026>
- Brooks, R. H., & Corey, A. T. (1966). Properties of porous media affecting fluid flow. *Journal of the Irrigation and Drainage Division*, 92(2), 61–88. <https://doi.org/10.1061/jrcea4.0000425>
- Buades, A., Coll, B., & Morel, J. M. (2008). Nonlocal image and movie denoising. *International Journal of Computer Vision*, 76(2), 123–139. <https://doi.org/10.1007/s11263-007-0052-1>
- Buckley, J. S., Liu, Y., & Monsterleet, S. (1998). Mechanisms of wetting alteration by crude oils. *SPE Journal*, 3(1), 54–61. <https://doi.org/10.2118/37230-PA>
- Bultreys, T., Boone, M. A., Boone, M. N., De Schryver, T., Masschaele, B., Van Hoorebeke, L., & Cnudde, V. (2016). Fast laboratory-based micro-computed tomography for pore-scale research: Illustrative experiments and perspectives on the future. *Advances in Water Resources*, 95, 341–351. <https://doi.org/10.1016/j.advwatres.2015.05.012>
- Bultreys, T., Boone, M. A., Boone, M. N., De Schryver, T., Masschaele, B., Van Loo, D., et al. (2015). Real-time visualization of Haines jumps in sandstone with laboratory-based microcomputed tomography. *Water Resources Research*, 51(10), 8668–8676. <https://doi.org/10.1002/2015WR017502>
- Bultreys, T., Lin, Q., Gao, Y., Raeini, A. Q., Alratrou, A., Bijeljic, B., & Blunt, M. J. (2018). Validation of model predictions of pore-scale fluid distributions during two-phase flow. *Physical Review E*, 97(5), 053104. <https://doi.org/10.1103/PhysRevE.97.053104>
- Bultreys, T., Van Hoorebeke, L., & Cnudde, V. (2015). Multi-scale, micro-computed tomography-based pore network models to simulate drainage in heterogeneous rocks. *Advances in Water Resources*, 78, 36–49. <https://doi.org/10.1016/j.advwatres.2015.02.003>
- Chen, Y., Jha, N. K., Lebedev, M., An, S., Xie, Q., & Niasar, V. J. (2021). Integral effects of initial fluids configuration and wettability alteration on remaining saturation: Characterization with X-ray micro-computed tomography. *Fuel*, 306, 121717. <https://doi.org/10.1016/j.fuel.2021.121717>
- Datta, S. S., Ramakrishnan, T. S., & Weitz, D. A. (2014). Mobilization of a trapped non-wetting fluid from a three-dimensional porous medium. *Physics of Fluids*, 26(2), 22002. <https://doi.org/10.1063/1.4866641>
- Dierick, M., Van Loo, D., Masschaele, B., Van Den Bulcke, J., Van Acker, J., Cnudde, V., & Van Hoorebeke, L. (2014). Recent micro-CT scanner developments at UGCT. *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms*, 324, 35–40. <https://doi.org/10.1016/j.nimb.2013.10.051>
- Gao, Y., Lin, Q., Bijeljic, B., & Blunt, M. J. (2017). X-Ray microtomography of intermittency in multiphase flow at steady state using a differential imaging method. *Water Resources Research*, 53(12), 10274–10292. <https://doi.org/10.1002/2017WR021736>
- Gao, Y., Qaseminejad Raeini, A., Blunt, M. J., & Bijeljic, B. (2019). Pore occupancy, relative permeability and flow intermittency measurements using X-ray micro-tomography in a complex carbonate. *Advances in Water Resources*, 129, 56–69. <https://doi.org/10.1016/j.advwatres.2019.04.007>
- Gao, Y., Raeini, A. Q., Selem, A. M., Bondino, I., Blunt, M. J., & Bijeljic, B. (2020). Pore-scale imaging with measurement of relative permeability and capillary pressure on the same reservoir sandstone sample under water-wet and mixed-wet conditions. *Advances in Water Resources*, 146, 103786. <https://doi.org/10.1016/j.advwatres.2020.103786>
- Garfi, G., John, C. M., Lin, Q., Berg, S., & Krevor, S. (2020). Fluid surface coverage showing the controls of rock mineralogy on the wetting state. *Geophysical Research Letters*, 47(8), e2019GL086380. <https://doi.org/10.1029/2019GL086380>
- Garing, C., de Chalendar, J. A., Voltolini, M., Ajo-Franklin, J. B., & Benson, S. M. (2017). Pore-scale capillary pressure analysis using multi-scale X-ray microtomography. *Advances in Water Resources*, 104, 223–241. <https://doi.org/10.1016/j.advwatres.2017.04.006>
- Guo, H., Song, K., & Hilfer, R. (2022). A brief review of capillary number and its use in capillary desaturation curves. *Transport in Porous Media*, 144(1), 3–31. <https://doi.org/10.1007/s11242-021-01743-7>
- Herring, A. L., Andersson, L., Newell, D. L., Carey, J. W., & Wildenschild, D. (2014). Pore-scale observations of supercritical CO₂ drainage in Bentheimer sandstone by synchrotron X-ray imaging. *International Journal of Greenhouse Gas Control*, 25, 93–101. <https://doi.org/10.1016/j.ijggc.2014.04.003>
- Herring, A. L., Middleton, J., Walsh, R., Kingston, A., & Sheppard, A. (2017). Flow rate impacts on capillary pressure and interface curvature of connected and disconnected fluid phases during multiphase flow in sandstone. *Advances in Water Resources*, 107, 460–469. <https://doi.org/10.1016/j.advwatres.2017.05.011>
- Iglauer, S., Paluszny, A., Pentland, C. H., & Blunt, M. J. (2011). Residual CO₂ imaged with X-ray micro-tomography. *Geophysical Research Letters*, 38(21), L21403. <https://doi.org/10.1029/2011GL049680>
- Kalhor, K., Ghasemzadeh, R., Rajic, L., & Alshawabkeh, A. (2019). Assessment of groundwater quality and remediation in karst aquifers: A review. *Groundwater for Sustainable Development*, 8, 104–121. <https://doi.org/10.1016/j.gsd.2018.10.004>
- Klise, K. A., Moriarty, D., Yoon, H., & Karpyn, Z. (2016). Automated contact angle estimation for three-dimensional X-ray microtomography data. *Advances in Water Resources*, 95, 152–160. <https://doi.org/10.1016/j.advwatres.2015.11.006>
- Kovscek, A. R., Wong, H., & Radke, C. J. (1993). A pore-level scenario for the development of mixed wettability in oil reservoirs. *AIChE Journal*, 39(6), 1072–1085. <https://doi.org/10.1002/aic.690390616>

- Li, T., Schlüter, S., Dragila, M. I., & Wildenschild, D. (2018). An improved method for estimating capillary pressure from 3D microtomography images and its application to the study of disconnected nonwetting phase. *Advances in Water Resources*, *114*, 249–260. <https://doi.org/10.1016/j.advwatres.2018.02.012>
- Lin, Q., Akai, T., Blunt, M. J., Bijeljic, B., Iwama, H., Takabayashi, K., et al. (2021). Pore-scale imaging of asphaltene-induced pore clogging in carbonate rocks. *Fuel*, *283*, 118871. <https://doi.org/10.1016/j.fuel.2020.118871>
- Lin, Q., Al-Khulaifi, Y., Blunt, M. J., & Bijeljic, B. (2016). Quantification of sub-resolution porosity in carbonate rocks by applying high-salinity contrast brine using X-ray microtomography differential imaging. *Advances in Water Resources*, *96*, 306–322. <https://doi.org/10.1016/j.advwatres.2016.08.002>
- Lin, Q., Bijeljic, B., Foroughi, S., Berg, S., & Blunt, M. J. (2021). Pore-scale imaging of displacement patterns in an altered-wettability carbonate. *Chemical Engineering Science*, *235*, 116464. <https://doi.org/10.1016/j.ces.2021.116464>
- Mascini, A., Boone, M., Van Offenwert, S., Wang, S., Cnudde, V., & Bultreys, T. (2021). Fluid invasion dynamics in porous media with complex wettability and connectivity. *Geophysical Research Letters*, *48*(22), 1–10. <https://doi.org/10.1029/2021GL095185>
- Mascini, A., Cnudde, V., & Bultreys, T. (2020). Event-based contact angle measurements inside porous media using time-resolved micro-computed tomography. *Journal of Colloid and Interface Science*, *572*, 354–363. <https://doi.org/10.1016/j.jcis.2020.03.099>
- Molenaar, N. (1998). Origin of low-permeability calcite-cemented lenses in shallow marine sandstones and CaCO₃ cementation mechanisms: An example from the Lower Jurassic Luxemburg Sandstone, Luxemburg. *Carbonate Cementation in Sandstones: Distribution Patterns and Geochemical Evolution*, 193–211.
- Morrow, N. R. (1990). Wettability and its effect on oil recovery. *JPT, Journal of Petroleum Technology*, *42*(12), 1476–1484. <https://doi.org/10.2118/21621-PA>
- Panfilov, M. (2010). Underground storage of hydrogen: In situ self-organisation and methane generation. *Transport in Porous Media*, *85*(3), 841–865. <https://doi.org/10.1007/s11242-010-9595-7>
- Reynolds, C. A., Menke, H., Andrew, M., Blunt, M. J., & Krevor, S. (2017). Dynamic fluid connectivity during steady-state multiphase flow in a sandstone. *Proceedings of the National Academy of Sciences of the United States of America*, *114*(31), 8187–8192. <https://doi.org/10.1073/pnas.1702834114>
- Rücker, M., Berg, S., Armstrong, R. T., Georgiadis, A., Ott, H., Schwing, A., et al. (2015). From connected pathway flow to ganglion dynamics. *Geophysical Research Letters*, *42*(10), 3888–3894. <https://doi.org/10.1002/2015GL064007>
- Ruspini, L. C., Øren, P. E., Berg, S., Masalmeh, S., Bultreys, T., Taberner, C., et al. (2021). Multiscale digital rock analysis for complex rocks. *Transport in Porous Media*, *139*(2), 301–325. <https://doi.org/10.1007/s11242-021-01667-2>
- Scanziani, A., Lin, Q., Alhosani, A., Blunt, M. J., & Bijeljic, B. (2020). Dynamics of fluid displacement in mixed-wet porous media. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, *476*(2240), 20200040. <https://doi.org/10.1098/rspa.2020.0040>
- Scanziani, A., Singh, K., Blunt, M. J., & Guadagnini, A. (2017). Automatic method for estimation of in situ effective contact angle from X-ray micro tomography images of two-phase flow in porous media. *Journal of Colloid and Interface Science*, *496*, 51–59. <https://doi.org/10.1016/j.jcis.2017.02.005>
- Shukla, R., Ranjith, P., Haque, A., & Choi, X. (2010). A review of studies on CO₂ sequestration and caprock integrity. *Fuel*, *89*(10), 2651–2664. <https://doi.org/10.1016/j.fuel.2010.05.012>
- Singh, K., Bultreys, T., Raeini, A. Q., Shams, M., & Blunt, M. J. (2022). New type of pore-snap-off and displacement correlations in imbibition. *Journal of Colloid and Interface Science*, *609*, 384–392. <https://doi.org/10.1016/j.jcis.2021.11.109>
- Soulaine, C., Gjetvaj, F., Garing, C., Roman, S., Russian, A., Gouze, P., & Tehelepi, H. A. (2016). The impact of sub-resolution porosity of X-ray microtomography images on the permeability. *Transport in Porous Media*, *113*(1), 227–243. <https://doi.org/10.1007/s11242-016-0690-2>
- Spurin, C., Bultreys, T., Bijeljic, B., Blunt, M. J., & Krevor, S. (2019). Intermittent fluid connectivity during two-phase flow in a heterogeneous carbonate rock. *Physical Review E*, *100*(4), 1–10. <https://doi.org/10.1103/PhysRevE.100.043103>
- Sun, C., McClure, J. E., Mostaghimi, P., Herring, A. L., Meisenheimer, D. E., Wildenschild, D., et al. (2020). Characterization of wetting using topological principles. *Journal of Colloid and Interface Science*, *578*, 106–115. <https://doi.org/10.1016/j.jcis.2020.05.076>
- Van Offenwert, S., Cnudde, V., & Bultreys, T. (2019). Pore-scale visualization and quantification of transient solute transport using fast micro-computed tomography. *Water Resources Research*, *55*(11), 9279–9291. <https://doi.org/10.1029/2019WR025880>
- Wang, S., Bultreys, T., Mascini, A., & Ruspini, L. (2023). Micro-CT imaging of capillary plate experiments on water-wet and mixed-wet heterogeneous sandstones [Dataset]. Digital Rocks Portal. <https://doi.org/10.17612/85EB-GV32>
- Wang, S., Ruspini, L. C., Øren, P. E., Van Offenwert, S., & Bultreys, T. (2022). Anchoring multi-scale models to micron-scale imaging of multiphase flow in rocks. *Water Resources Research*, *58*(1), 1–16. <https://doi.org/10.1029/2021WR030870>
- Zankoor, A., Khishvand, M., Mohamed, A., Wang, R., & Piri, M. (2021). In-situ capillary pressure and wettability in natural porous media: Multi-scale experimentation and automated characterization using X-ray images. *Journal of Colloid and Interface Science*, *603*, 356–369. <https://doi.org/10.1016/j.jcis.2021.06.052>
- Zhang, X., Crawford, J. W., Flavel, R. J., & Young, I. M. (2016). A multi-scale Lattice Boltzmann model for simulating solute transport in 3D X-ray micro-tomography images of aggregated porous materials. *Journal of Hydrology*, *541*, 1020–1029. <https://doi.org/10.1016/j.jhydrol.2016.08.013>